



Screwdriving technology

Automation

Air motors

Air tools

# DEPRAG

**NEW  
MINIMAT -ED  
DIGITAL ELECTRIC  
SCREWDRIVER**

## MINIMAT-ED Digital electric screwdriver with an integrated electromagnetic shut-off clutch

**Torque ranges between 0.6 - 5 Nm**

The innovative electric Screwdriver MINIMAT ED – the first Screwdriver with an electromagnetic shut-off clutch, a convenient torque setting by the push of a button and a digital torque-display directly on the screwdriver.

This handy Multi-Tool can be adapted, quickly and easily, to fit a new screw assembly.

Versatile screwdriving is made effortless through PLUG AND PLAY!

- **Flexible**  
The required torque can be set directly on the screwdriver by the push of a button.
- **Economical**  
Attractive purchase price and compact size due to the fully integrated controller.
- **Ergonomic**
  - Digital display of the preset torque directly on the screwdriver
  - Trigger-start or push-to-start
  - The rotational direction can be set by the push of a button and the selected rotation is shown by an animated display
  - Integrated quick change chuck for easy bit/socket exchange
  - Suspension hanger for balancer hookup
  - Low noise level
  - Ergonomic design
  - Flexible power cable
- **Precise and reliable**
  - Torque precision as is customary with all DEPRAG control screwdrivers
  - Password protected against unauthorized changes to the preset parameter
  - Good/Bad cycle indication by LED lights red/green
  - ESD-safe
  - Integrated diagnostics
- **Robust**  
As robust as the well-known DEPRAG-MINIMAT screwdriver series: absolutely reliable and renowned for durability



The flexible, innovative DEPRAG screwdriver MINIMAT-ED with electromagnetic shut-off clutch makes versatile screwdriving effortless: Plug and Play!

The operator connects the screwdriver to the electricity supply using a highly flexible anti-kink tool cable via a power unit. The operator then presses a button on the screwdriver to choose the torque and required measurement units (Nm or in.lbs).

One look at the digital display on the device is enough – the screwdriving can begin – either by selecting trigger-start or push-to-start.

The ergonomic screwdriver has the high torque accuracy as is standard for the reliable DEPRAG control screwdrivers.

Red and green LED lights immediately display the results of the assembly to the operator.

The product is password protected against unauthorized parameter changes. The integrated diagnostic functions such as motor tests in right and left rotation, tests of the switch function on the electronic clutch and signal monitoring all provide optimum processing assurance. Even the rotational direction can be set at the push of a button and is shown on an animated display directly on the screwdriver. The screwdriver provides every convenience needed for reliable operation.

Additionally the screwdriver also has the well-known DEPRAG standard features.

This includes the body casing which is non-slip and kind to the skin with an ergonomic, angular shape which fits to the hand. A balancer hook is also included. The integrated quick change chuck makes tool changes easy.

The MINIMAT-ED can be used on voltage between 100 and 240 volts and for both left-hand and right-hand threads. The main rotational direction is optional; the screwdriver switches the torque between left and right and uses maximum loosening torque when turning in the opposite direction.

An additional bonus is the guarantee of the ESD feature, for use in the electrical industry.

## Technical Data

### MINIMAT-ED straight handle design

Screwdriver	type order no.	345EG36-0050 400036 G	345EG36-0030 400036 H
Torque min.	Nm / in.lbs	1 / 8.85	0.6 / 5.3
Torque max.	Nm / in.lbs	5 / 44.3	3 / 26.6
Speed	rpm	500	810
Diameter	mm / in.	36 / 1.4	36 / 1.4
Length	mm / in.	308 / 12	308 / 12
Weight	kg / lbs.	1 / 2.2	1 / 2.2
Noise level	dB(A)	60	60
Internal hex drive DIN 3126		F6.3 (1/4")	F6.3(1/4")
Suitable inserting tools and connection parts with inserting end DIN 3126		E6.3 (1/4")	E6.3 (1/4")

### MINIMAT-ED pistol grip

Screwdriver	type order no.	345EP36-0050 410455 G	345EP36-0030 410455 H
Torque min.	Nm / in.lbs	1 / 8.85	0.6 / 0.05
Torque max.	Nm / in.lbs	5 / 44.3	3 / 26.6
Speed	rpm	500	810
Diameter	mm / in.	36 / 1.4	36 / 1.4
Length	mm / in.	301 / 11.7	301 / 11.7
Weight	kg / lbs.	1.2 / 2.6	1.2 / 2.6
Noise level	dB(A)	60	60
Internal hex drive DIN 3126		F6.3 (1/4")	F6.3(1/4")
Suitable inserting tools and connection parts with inserting end DIN 3126		E6.3 (1/4")	E6.3 (1/4")

## Required Accessories

<b>Power unit</b> (incl. power supply cable KN AST 10-EU and KN AST 10-US)		order no.	385491 A
Wide range input voltage (AC)	V / Hz		100 - 240 / 50/60
Output voltage (DC)	V / Amp		24 / 13
Dimensions (W x H x D)	mm / in.		130/5.1 x 70/2.7 x 277/10.8
Weight	kg / lbs.		2.6 / 5.7
<b>Motor cable</b>			
Length	2.5 m / 8.2 ft. (standard)	<b>type</b> order no.	<b>KMO AST10-2.5 m</b> 385442 A
Length	5 m / 16.4 ft.	<b>type</b> order no.	<b>KMO AST10-5m</b> 385442 B
Length	8 m / 26.2 ft.	<b>type</b> order no.	<b>KMO AST10-8 m</b> 385442 C
Length	12 m / 39.4 ft.	<b>type</b> order no.	<b>KMO AST10-12 m</b> 385442 D



Power unit



Motor cable

## Optional Equipment

suitable for		straight handle design	pistol grip
Spring-Sleeve cpl.	order no.	364672 A	364672 A
Spring-Sleeve cpl., with screw suction	order no.	364672 C	364672 C
Linear Stand	order no.	408010 A	–
Screwdriver adapter (for Linear Stand / Parallelogram Stand)	order no.	400833 S	–
Parallelogram Stand	order no.	406253 A	
Support Ring	order no.	412892	–


For suitable balancer see brochure D 3340.

Power supply cable		type	order no.
Length	1.8 m / 5.9 ft.	<b>KN AST10-EU</b>	385443 A
Length	1.8 m / 5.9 ft.	<b>KN AST10-US</b>	385443 B
Length	2.5 m / 8.2 ft	<b>KN AST10-China</b>	385443 C

Power supply cable KN AST10-EU and KN AST10-US are already included with the power unit.



Power supply cable

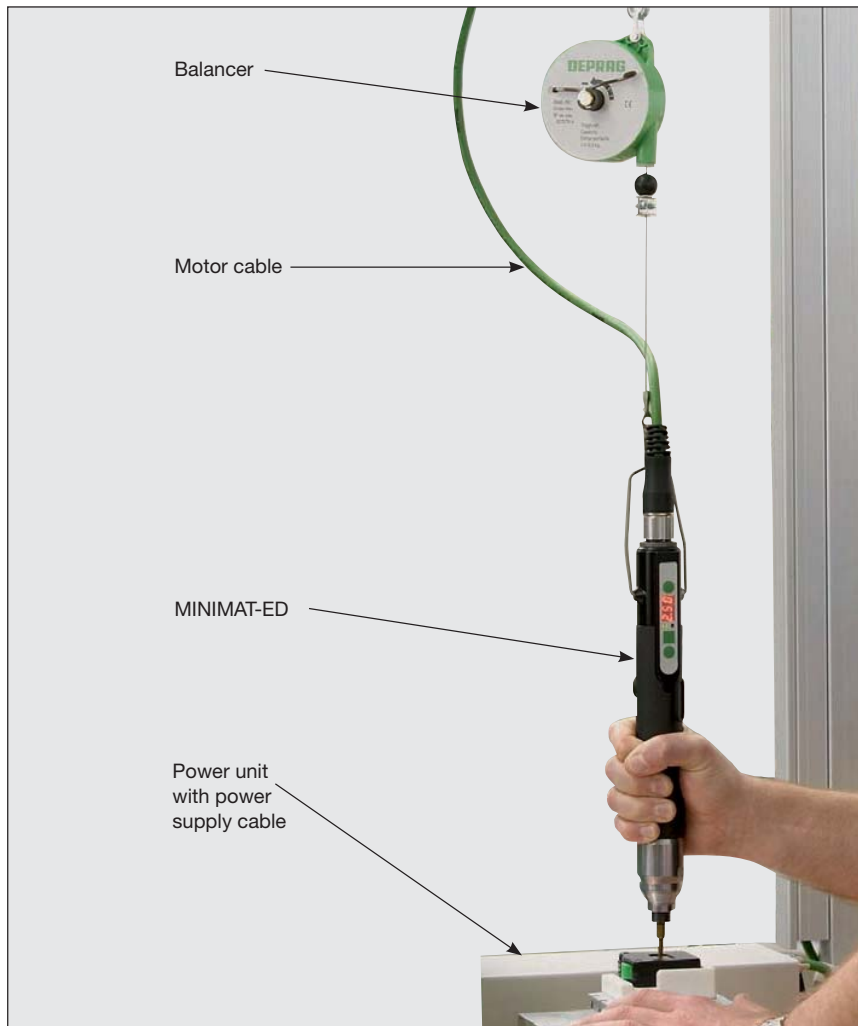

# DEPRAG

## DEPRAG INC.

P.O. Box 1554 · Lewisville, Texas 75067 - 1544  
 640 Hembry Street · Lewisville, Texas 75057 - 4728  
 Phone (972) 221 - 8731 · FAX (972) 221 - 8163  
 TOLL FREE (800) 4 DEPRAG  
 www.deprag.com  
 deprag@depragusa.com

# DEPRAG

## DEPRAG SCHULZ GMBH u. CO.

P.O. Box 1352, D-92203 Amberg, Germany  
 Kurfürstenring 12-18, D-92224 Amberg  
 Phone (096 21) 371-0, Fax (096 21) 371-120  
 www.deprag.com  
 info@deprag.de



CERTIFIED AS PER DIN EN ISO 9001